

# Dependability of Bursting Strength on Sulphate Reducing Bacteria Promoted Corrosion of Natural Gas Pipelines

A. Chennakesava Reddy

**Abstract**— The aim of the present work was to calculate the bursting pressure of natural gas pipelines. The external corrosion was due to sulphate reducing bacteria. The failure of the pipes was evaluated based on the Tresca, von Mises criteria, Weibull criteria and finite element analysis. The significance of crack dimensions was recognized using Taguchi techniques. The highly influencing crack dimension was crack depth. The results obtained by the modified ASME B31G have been more realistic to the actual burst of pipes.

**Index Terms**— Natural gas, high carbon steel, crack depth, crack length, bursting pressure, Tresca criterion, von Mises criterion.

## 1. INTRODUCTION

**C**ORROSION is one of the leading causes of failures in onshore transmission pipelines. For the year 2014-15, production of natural gas is 33.656 Billion Cubic Meters (BCM) which is 4.94 % lower than production of 35.407 BCM in 2013-14 (figure 1) [1]. The corrosion was accountable for 18 percent of the significant incidents in the 20-year period from 1988 through 2008 in United States. The significant corrosion incidents were 52 per year on pipelines during the past 20 years [2].

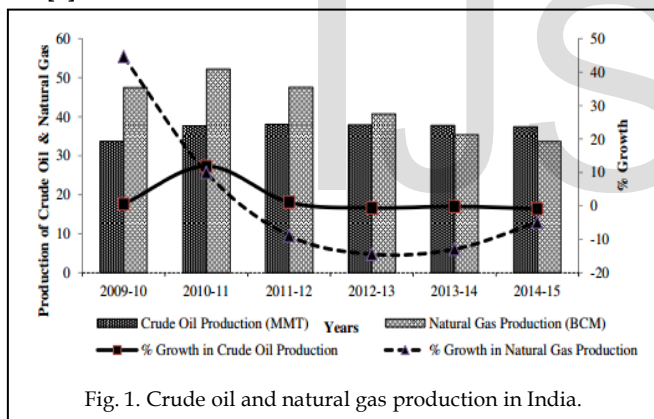


Fig. 1. Crude oil and natural gas production in India.

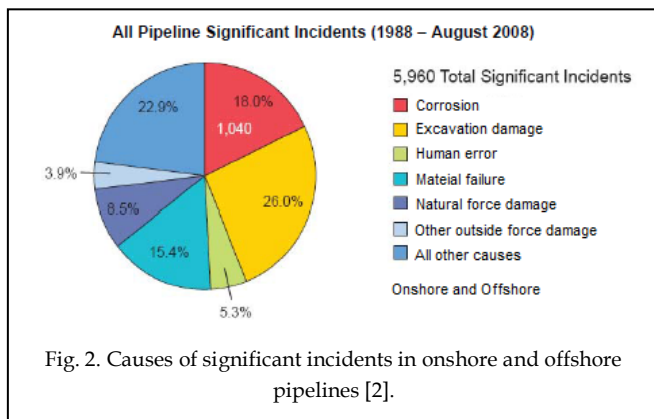


Fig. 2. Causes of significant incidents in onshore and offshore pipelines [2].

External corrosion causes more than 90 percent of corrosion-

related failure in distribution pipelines. The transmission lines experiences the internal corrosion. For external corrosion, the environment could be groundwater or moist soil for onshore pipelines and seawater for offshore pipelines. For internal corrosion, the environment could be water holding sodium chloride, hydrogen sulfide and carbon dioxide. MIC (Microbiologically influenced corrosion) is caused by microbes whose actions instigate the corrosion cycle. The main types are sulphate-reducing bacteria (SRB) and acid-producing bacteria (APB). Bacteria can encourage external corrosion by depolarizing the pipe through the utilization of hydrogen gas formed at the pipe surface by the cathodic protection currents [3]. Once the pipe is depolarized, corrosion can take place. The internal corrosion can happen by bacteria forming an acidic biofilm that traps electrolytes and acids. The corrosion mechanism is illustrated schematically in figure 4. The external and internal corrosions are showed in figure 5. The consequence of pipeline corrosion is the reduction of pipe strength. Even if the pressure in the gas pipeline is not increased the pipeline may burst due to deduction of pipe strength resulting property and public loss.

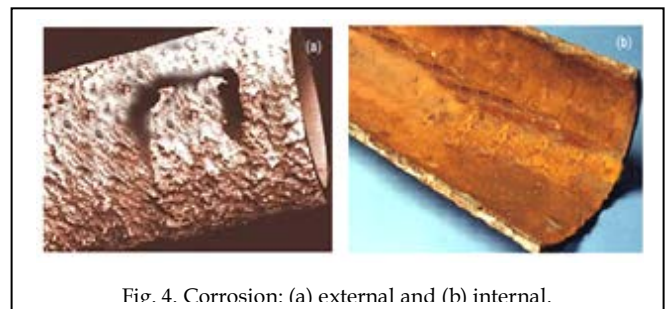


Fig. 4. Corrosion: (a) external and (b) internal.

The natural gas pipeline burst at Nagaram village, Andhra Pradesh, India, Friday, June 27, 2014 is shown in figures 6 and 7. The death toll in the GAIL pipeline blast, which occurred at Nagaram village in East Godavari district of Andhra Pradesh rose to 16. The pipeline, which caught fire and exploded, claimed 15 lives on the spot. GAIL is being criticized by the villagers for "gross negligence" in maintaining the pipelines which led to the accident. In another incident flames shoot into the air after a natural gas pipeline explosion in Texas, this

• A. Chennakesava Reddy is currently Professor and BOS Chairman, Department of Mechanical engineering, JNT University Hyderabad, India, Mobile-09440568776. E-mail: acreddy@jntuh.ac.in

killed one man and injured seven others (figure 8).



Fig. 5. The Andhra Pradesh Chief Minister N. Chandrababu Naidu and Petroleum Minister Dharmendra Pradhan inspecting the blast site of GAIL gas pipeline blast. (AP Photo)



Fig. 7. Causalities due to GAIL gas pipeline blast.



Fig. 8. Flames shoot into the air after a natural gas pipeline explosion in Texas.

Even if research on fracture mechanics of the pipelines is well-to-do, there is no judgment method that is accurate and largely acknowledged. Most popular failure pressure methods for pressurized pipes with active corrosion defects are ASME B31G [4, 5] and modified ASME B31G [6], DNV-RP-F101 [7, 8], SHELL-92 [9, 10], RSTRENG [11, 12], PCORRC [13, 14], LG-18 [15, 16], Fitnet FSS [17, 18] and Choi criteria. Finite element methods have been applied to predict total deformation, von Mises stress, stress intensity factors and J-integral for the applied pressure on the pipes [20-22].

The present work was to predict the dependability of bursting strength on corrosion of natural gas pipelines. The corrosion was also investigated in terms of sulphate-reducing bacteria (SRB) and acid-producing bacteria (APB). The bursting pressure was evaluated using ASME B31G, modified ASME B31G, DNV-RP-F101, SHELL-92, PCORRC, LG-18, RSTRENG, Fitnet FSS and Choi criteria. The Weibull criterion was applied to find the reliability of pipes. The finite element analysis was used to verify the results obtained by the computational methods.

TABLE 1  
 Control factors and their levels

Factor	Symbol	Level-1	Level-2	Level-3
Thickness, mm	A	3	4	5
Length of crack, mm	B	200	250	300
Depth of crack	C	40%t	50%t	60%t
Grade of high carbon steel	D	1060	1095	1080

where t is pipe thickness.

TABLE 2  
 Orthogonal Array (L9) and control factors

Treat No.	A	B	C	D
1	1	1	1	1
2	1	2	2	2
3	1	3	3	3
4	2	1	2	3
5	2	2	3	1
6	2	3	1	2
7	3	1	3	2
8	3	2	1	3
9	3	3	2	1

## 2. MATERIAL AND METHODS

The material of pipes was stainless steel. In the present study, the dimensions of the test pipe were 150 mm outer diameter and 5000 mm length. The chosen control parameters are summarized in table 1. The control factors were assigned to the various columns of orthogonal array (OA), L9 [23] is given in table 2. The dimensions of notch are given in figure 9.

31G criterion and the upper limit stands for the results obtained from RESTRENG criterion.

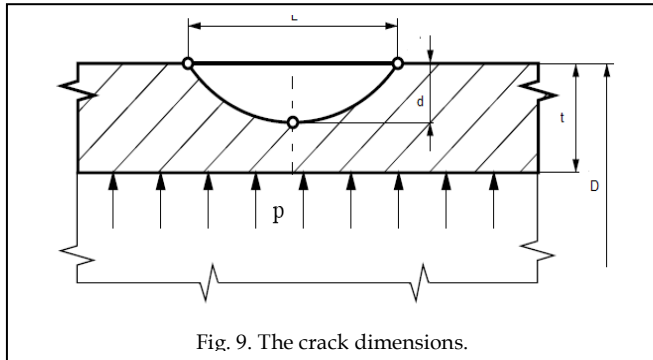


Fig. 9. The crack dimensions.

The Tresca criterion is the first classical yield criterion in the strength theory for isotropic ductile materials, often referred to as the maximum shear stress criterion. In principal stress space ( $\sigma_1, \sigma_2, \sigma_3$ ), the Tresca criterion can be expressed as

$$\tau_{\max} = \max\left(\frac{|\sigma_1 - \sigma_2|}{2}, \frac{|\sigma_2 - \sigma_3|}{2}, \frac{|\sigma_1 - \sigma_3|}{2}\right) = \frac{\sigma_{YS}}{2} \quad (1)$$

where  $\tau_{\max}$  is the maximum shear stress and  $\sigma_{\text{uts}}$  is the ultimate tensile strength in tension.

The von Mises criterion is the second classical yield criterion in strength theory, often referred to as the octahedral shear stress criterion. It can be expressed by the principal stresses in the form:

$$\tau_{\text{vm}} = \sqrt{\frac{1}{6}[(\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2 + (\sigma_3 - \sigma_1)^2]} = \frac{\sigma_{YS}}{\sqrt{3}} \quad (2)$$

where  $\tau_{\text{vm}}$  is the von Mises effective shear stress.

The von Mises yield surfaces in principal stress coordinates circumscribes a cylinder with radius  $\sqrt{2/3} \sigma$  around the hydrostatic axis. Also shown is Tresca's hexagonal yield surface (figure 6). Intersection of the von Mises yield criterion with the  $\sigma_1, \sigma_2$  plane, where  $\sigma_3 = 0$  (figure 9).

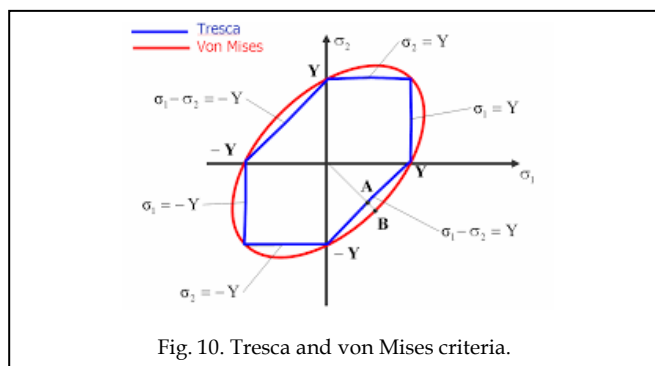


Fig. 10. Tresca and von Mises criteria.

### 3. RESULTS AND DISCUSSION

The bursting pressures computed from PCORRC, ASME B31G, modified ASME B31G, DNV-RP-F101, SHELL-92, RSTRENG, Fitnet FSS and Choi criteria are given in figure 11. The lower limit represents the results obtained from ASME

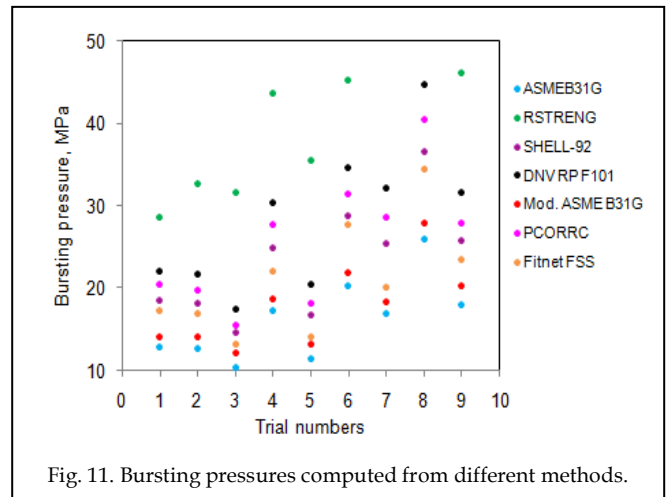


Fig. 11. Bursting pressures computed from different methods.

TABLE 3

ANOVA summary of the bursting pressure based on modified ASME 31G criterion.

Source	Sum 1	Sum 2	Sum 3	SS	v	V	F	P
A	40.33	54.00	66.53	114.5	1	114.5	24710.43	55.29
B	51.39	55.16	54.30	2.61	1	2.61	563.27	1.26
C	64.04	53.10	43.71	69.06	1	69.06	14903.95	33.35
D	47.65	988.52	160.85	20.9	1	20.9	4510.46	10.09
e				0.018535	4	0.004634	1.00	0.01
T	203.40	1150.79	325.39	207.0885	8			100

Note: SS is the sum of square, v is the degrees of freedom, V is the variance, F is the Fisher's ratio, P is the percentage of contribution and T is the sum squares due to total variation.

#### 3.1 Influence of Crack Dimensions and Tube Material on Bursting Strength

Table 3 gives the ANOVA (analysis of variation) summary of bursting pressure. Even if all the process parameters could satisfy the Fisher's test at 90% confidence level, pipe thickness, crack depth and grade of high carbon steels had major role in the total variation of bursting pressure. The pipe thickness (A), crack depth (C) and grade of high carbon steels (D) had given, respectively, 55.29%, 33.35% and 10.09% in the total variation of the bursting pressure. The crack length (B) was insignificant.

Figure 12 shows the dependence of bursting pressure on the pipe thickness. As the pipe thickness increased the pressure required to burst the pipe would also increase. If the crack depth increased, the pipe could fail even at low bursting pressure (figure 13). The required bursting pressure was high (figure 14) for the high carbon steel 1080 as compared to the other two grades (grades 1060 and 1095 high carbon steels). The yield strength, ultimate tensile strength and percentage elongation at break are, respectively, 585 MPa, 965 MPa and 17%.



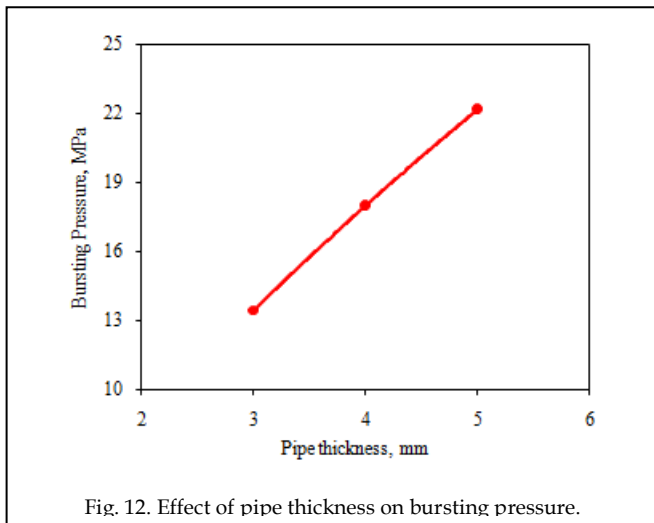


Fig. 12. Effect of pipe thickness on bursting pressure.

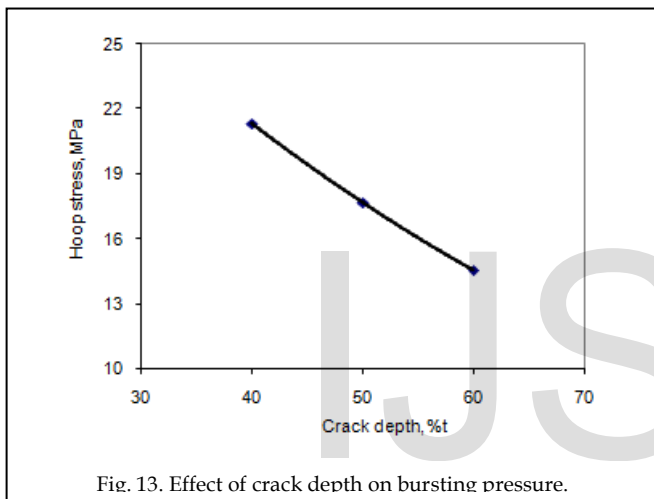


Fig. 13. Effect of crack depth on bursting pressure.

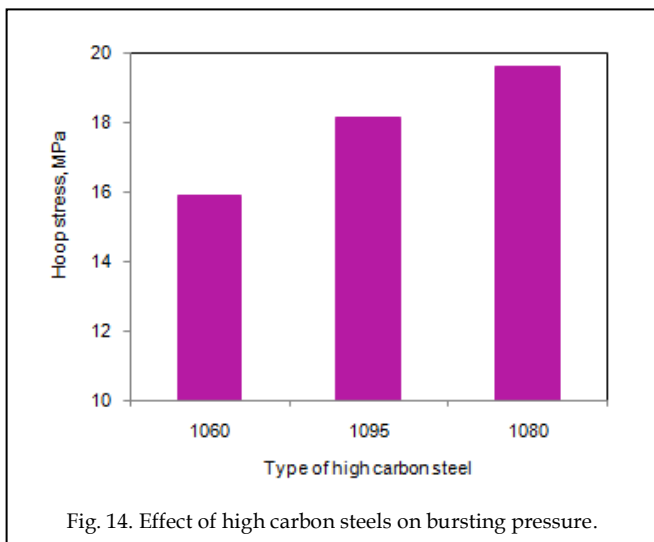


Fig. 14. Effect of high carbon steels on bursting pressure.

### 3.2 Failure Criteria

Table 4 and 5 give the ANOVA (analysis of variation) summary of Tresca criterion and von Mises criterion respectively. Even though all the process parameters could assure the Fisher's test at 90% confidence level, only crack depth and grade of high carbon steels had leading roles in the total variation of

Tresca and von Mises criteria. The crack depth (C) contributed nearly 79.53% of the total variation in the Tresca and von Mises criteria. The grade of high carbon steel (D) put in 19.10% of the total variation in the Tresca and von Mises criteria. The pipe thickness and the crack length were insignificant in the variation of Tresca and von Mises criteria.

TABLE 4  
 ANOVA summary of the Tresca criterion

Source	Sum 1	Sum 2	Sum 3	SS	v	V	F	P
A	493.98	492.76	482.33	27.37	1	27.37	16579.40	0.43
B	478.72	495.06	495.29	60.18	1	60.18	36454.08	0.94
C	576.46	490.57	402.05	5069.81	1	5069.81	3071041.1	79.53
D	441.14	85466.07	1469.08	1217.33	1	1217.33	737398.55	19.1
e				0.006603	4	0.001650	1.00	0
T	1990.3	86944.46	2848.75	6374.683	8			100

TABLE 5  
 ANOVA summary of the von Mises criterion

Source	Sum 1	Sum 2	Sum 3	SS	v	V	F	P
A	855.61	853.49	835.42	82.1	1	82.1	33475.61	0.43
B	829.17	857.47	857.87	180.54	1	180.54	73613.71	0.94
C	998.45	849.69	696.38	15209.43	1	15209.43	6201521.1	79.53
D	764.07	256398.2	2544.51	3651.98	1	3651.98	1489065.0	19.1
e				0.009810	4	0.002452	1.00	0
T	3447.3	258958.8	4934.18	19124.04	8			100





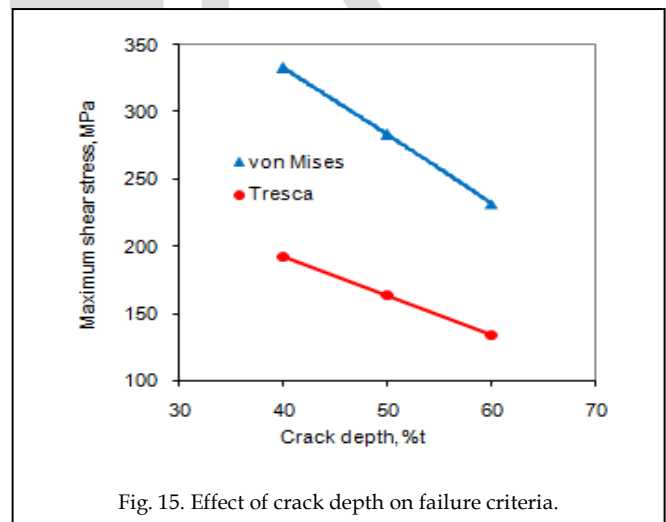


Fig. 15. Effect of crack depth on failure criteria.

As the crack depth increased the level of failure shear stress decreased (figure 15). The level of maximum shear stress was low for the 1060 high carbon steel and it was high for the 1080 high carbon steel (figure 16). As observed from figure 17a, only pipes 1 and 6 were burst under von Mises failure criterion even though all the pipes were found safe under Tresca criterion (figure 17b). With the increase of internal pressure, the stress variation through the ligament exhibits three distinct

stages; elastic deformation, plastic deformation and material hardening.

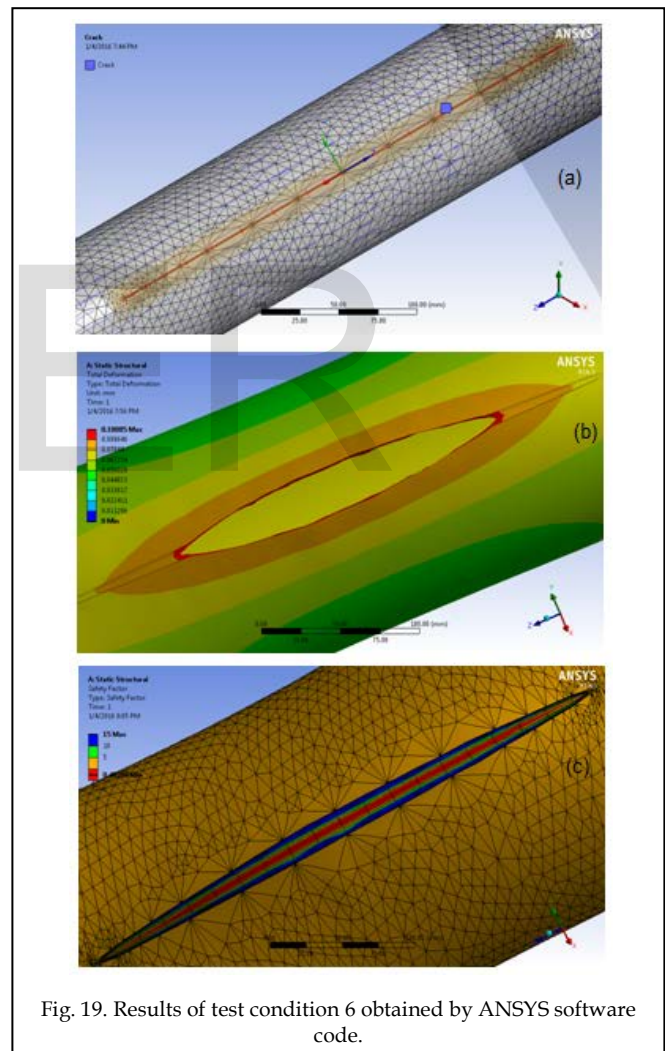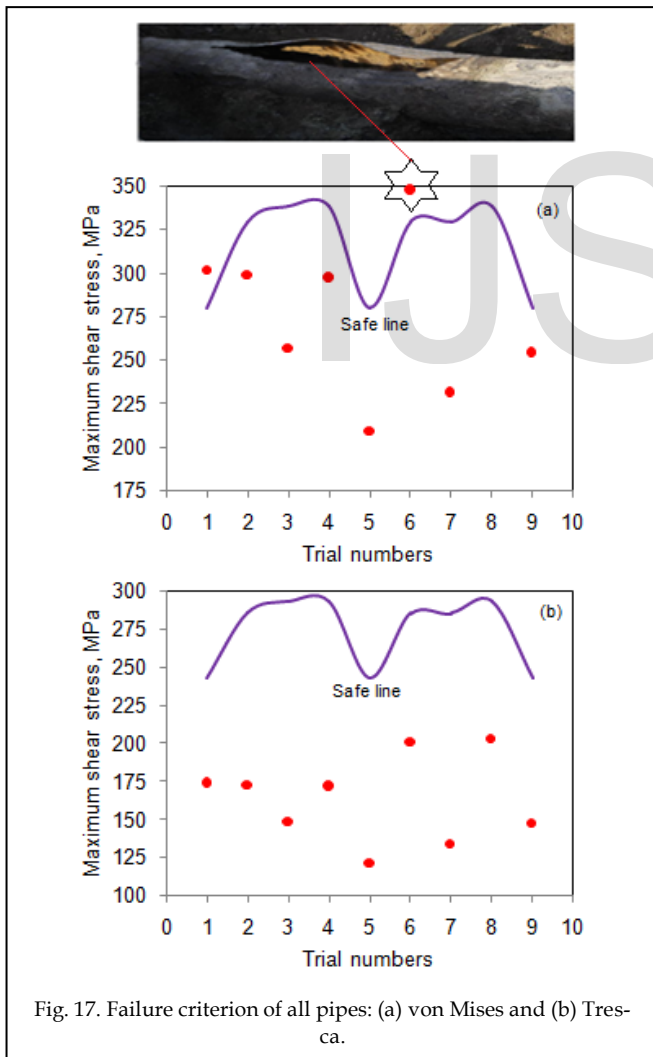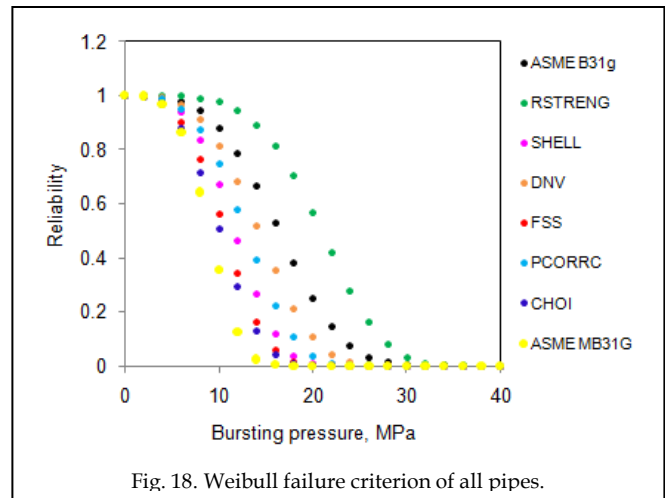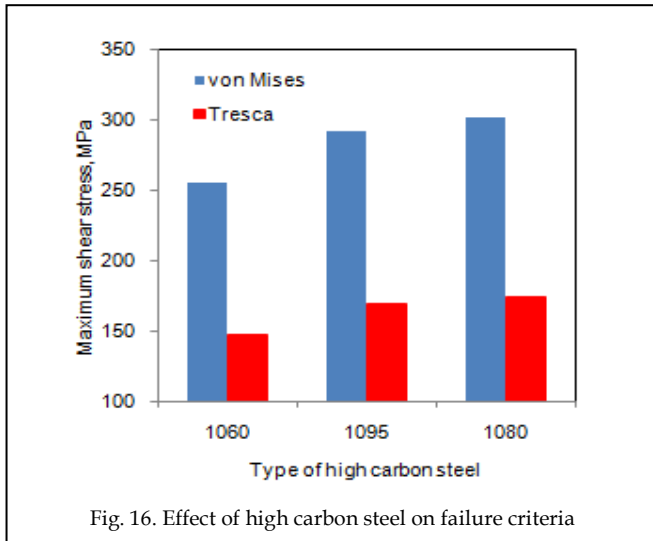

The Weibull criterion was used to predict the reliability of all the pipes. The least reliable criterion was ASME modified 31G and the most reliable criterion was RESTRENG (figure 19). For 80% of reliability the maximum bursting pressure were, respectively, 13.34 MPa and 32.43 MPa for ASME modified 31G and RESTRENG criteria. For test condition 6 the

bursting pressures were 21.98 MPa at danger level of reliability of 0.20. The crack dimensions of test conditions were 300mm crack length and crack depth 1.6 mm. The finite element modeling was carried out using ANSYS software code. The pipe and crack were discretized with tetrahedron elements [24] as shown in figure 19a. The crack opening (figure 19b) was matched with the experimental one (figure 17). The safety factor was about 0.4 across the crack area (figure 19c).

The reason for the failure of the pipe was due to the external corrosion (figure 20) of the pipeline attributable to (SRB) sulphate-reducing bacteria. SRB can act as a catalyst in the reduction reaction of sulphate to sulfide. In the presence of moisture content, the corrosion of metals begins with production of enzymes, which can accelerate the reduction of sulphate compounds to H<sub>2</sub>S. The mechanism of SRB is as follows:

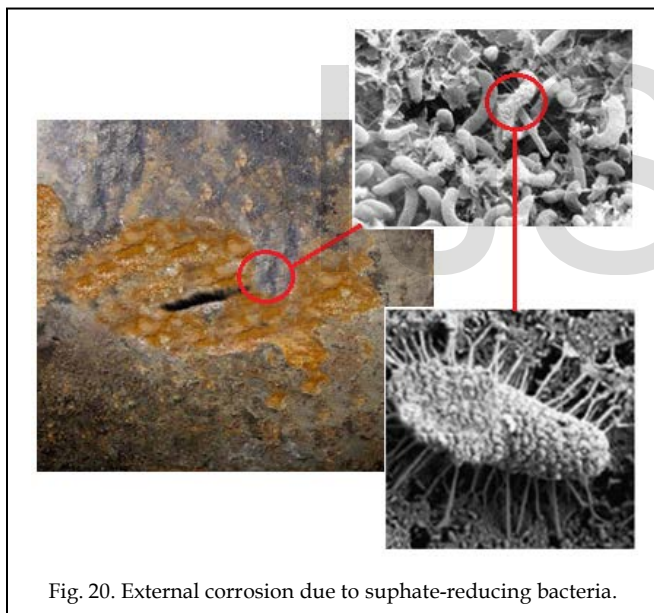
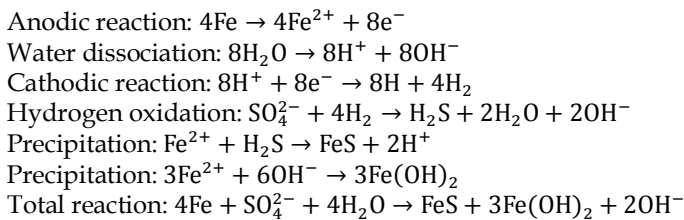


Fig. 20. External corrosion due to sulphate-reducing bacteria.

The solid FeS on the metal surface played the role of absorber of molecular hydrogen. The area covered by iron sulfide becomes cathode, while biofilm area behaves as anode. The sour environments are exclusively corrosive because of high levels of hydrogen available at the metal surface or in a crack because of sulfide activation at the cathode. In the first stage, the adsorption of bacterial cells and iron sulfide products were taken place (figure 21). In the second stage, the metal was encapsulated by a combination film of iron sulfide film and extracellular polymeric substances. Bacterial corrosion and film stabilization are two major occurrences at this stage. The third stage was controlled by a local pH decrease that caused by SRB activity on the steel in the presence of HS [25].

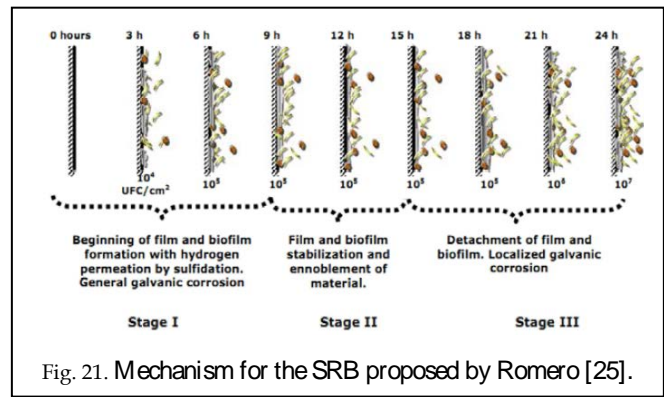


Fig. 21. Mechanism for the SRB proposed by Romero [25].

#### 4. CONCLUSIONS

The corrosion was due to sulphate-reducing bacteria. The bursting pressure is highly dependent on the crack depth and grade of high carbon steel. The bursting pressure decreases with the increase of crack depth. The von Mises criterion is very near the failure pattern of the pipes. The failure criteria would satisfy the predicted results from the finite element analysis, Weibull criterion and ASME modified 31G criterion used for the estimation of the bursting strength.

#### REFERENCES

- [1] Indian Petroleum and Natural Gas Statistics, Govt. of India, New Delhi, 2014-15.
- [2] U.S. Department of Transportation Pipeline and Hazardous Materials Safety Administration Office of Pipeline Safety, DTRS56-02-D-70036.
- [3] A. W. Peabody, "Peabody's Control of Pipeline Corrosion," Edited by R.L. Bianchetti, 2001.
- [4] American National Standards Institute (ANSI) / American Society of Mechanical Engineers (ASME): Manual for determining the remaining strength of corroded pipelines, ASME B31G, 1991.
- [5] A. C. Reddy, "Prediction of bursting pressure of thin walled 316 stainless steel pipes based on ASME B31G criterion," National Conference on Advances in Design Approaches and Production Technologies (ADAPT-2005), Hyderabad, 22-23rd August 2005, pp. 225-228.
- [6] A. C. Reddy, "Decent prophecy of bursting strength of natural gas pipelines based on modified ASME B31G criterion," National Conference on Excellence in Manufacturing and Service Organizations: The Six Sigma Way, Hyderabad, 26-27 August 2010, 112-115.
- [7] Anon, DNV-RP-F101, Corroded Pipelines, Det Norske Veritas, 1999.
- [8] A. C. Reddy, "Estimation of bursting pressure of thin walled 304 stainless steel pipes based on DNV RP F101 criterion," National Conference on Advances in Design Approaches and Production Technologies (ADAPT-2005), Hyderabad, 22-23rd August 2005, pp. 229-231.
- [9] D. Ritchie and S. Last, "Burst Criteria of Corroded Pipelines - Defect Acceptance Criteria," Paper 32, Proceedings of the EPRG/PRC 10th Biennial Joint Technical Meeting on Line

- Pipe Research, Cambridge, UK, 18-21 April 1995, pp. 32-1 - 32-11.
- [10] A. C. Reddy, "Reliability assessment of corrosion cracks in cold rolled 302 stainless steel pipes based on SHELL-92 criterion," National Conference on Advances in Design Approaches and Production Technologies (ADAPT-2005), Hyderabad, 22-23rd August 2005, pp. 232-234.
- [11] J. F. Kiefner and P. H. Vieth, "A Modified Criterion for Evaluating the Strength of Corroded Pipe," Final Report for Project PR 3-805 to the Pipeline Supervisory Committee of the American Gas Association, Battelle, Ohio, 1989.
- [12] A. C. Reddy, "Trustworthiness judgment of corrosion cracks in cold rolled 305 stainless steel pipes based on RSTRENG criterion," National Conference on Advances in Design Approaches and Production Technologies (ADAPT-2005), Hyderabad, 22-23rd August 2005, pp. 235-237.
- [13] D.R. Stephens and B.N. Leis, "Development of an Alternative Criterion for Residual Strength of Corrosion Defects in Moderate- to High-Toughness Pipe," Volume 2, Proceedings of the Third International Pipeline Conference (IPC 2000), Calgary, Alberta, Canada, American Society of Mechanical Engineers, 1-5 October 2000, pp. 781-792.
- [14] A. C. Reddy, "Consistency prediction of bursting strength of 317 stainless steel pipes based on PCORSS (Batelle) criterion," National Conference on Excellence in Manufacturing and Service Organizations: The Six Sigma Way, Hyderabad, 26-27th August 2010, pp. 105-108.
- [15] A. Cosham, P. Hopkins, P. and K. A. Macdonald, "Best Practice for the Assessment of Defects in Pipelines-Corrosions," Engineering Failure Analysis, no. 14, pp. 1245-1265, 2007.
- [16] A. C. Reddy, "Reliable forecasting of remaining strength of petroleum pipelines based on LG-18 criterion," National Conference on Excellence in Manufacturing and Service Organizations: The Six Sigma Way, Hyderabad, 26-27 August 2010, 109-111.
- [17] GTC1 - 2001 - 43049, FITNET, European Fitness for Service Network.
- [18] A. C. Reddy, "Trustworthy prediction of bursting strength of ductile iron pipes based on Fitnet FSS criterion," International Journal of Research in Engineering and Technology, vol. 4, no.12, pp. 48-53, 2015.
- [19] J. B. Choi, B.K. Goo, J.C. Kim, Y.J. Kim and W.S. Kim, "Development of limit load solutions for corroded gas pipelines," International Journal of Pressure Vessels Piping, vol. 80, pp.121-128, 2003.
- [20] D.U.M. Manikanta and A. C. Reddy, "Fracture Behavior of 6061 Al-Alloy Pipes under Bursting Loads with Crack Depth Variation," International Journal of Scientific & Engineering Research, vol. 06, no.03, pp. 338-343, 2015.
- [20] R. V. S. K. Varma, A. C. Reddy, "Optimization of Bursting Behavior of AA2090 Al-Alloy Pipes Using Taguchi Techniques and Finite Element Analysis," International Journal of Scientific Engineering and Research, vol.3, no. 12, pp. 35-38, 2015.
- [21] M. Akhil, A. C. Reddy, "Evaluation of Structural Integrity under Bursting Conditions of Heat Treated 2219 Al-Alloy Pipes Using Finite Element Analysis," International Journal of Scientific Engineering and Research, vol. 3, no. 12, pp. 39-43, 2015.
- [22] A. Sreeteja, A. C. Reddy, "Influence of Crack Size on Fracture Behavior of Heat Treated 2011 Al-Alloy Pipes Using Finite Element Analysis," International Journal of Scientific Engineering and Research, vol. 3, no. 12, pp. 47-50, 2015.
- [23] A. C. Reddy and V.M. Shamraj, "Reduction of cracks in the cylinder liners choosing right process variables by Taguchi method," Foundry Journal, vol.10, no.4, pp.47-50, 1998.
- [24] C.R. Alavala, "Finite Element Methods: Basic Concepts and Applications," PHI Learning Pvt. Ltd., New Delhi, 2008.
- [25] M. Romero, "The Mechanism of SRB Action in MIC, Based on Sulfide Corrosion and Iron Sulfide Corrosion Products," Corrosion, 2005.