

Processing of AA4015-Silicon Oxide Particulate Metal Matrix Composites by Stir Casting Technology

¹A. C. S. Kumar and A. Chennakesava Reddy²

^{1,2}Professor, Department of Mechanical Engineering, JNT University, Hyderabad, India
dr_acreddy@yahoo.com

Abstract: Particulate metal matrix composites have fascinated interest for application in numerous fields. The current processing methods often produce clustering of nano particles and porosity in the ductile matrix and as a result these composites exhibit extremely low ductility. The purpose of this work was to understand the effect of clustering and porosity on the micromechanical properties of AA4015/ZrO₂ metal matrix composites. The composites were manufactured by stir casting practice and high pressure die casting process at three volume fractions of SiO₂. Three results obtained from the finite elements method were compared with those of experimental procedure and empirical computations. Two types of finite element models were proposed with and without clustering and porosity. The microstructures of AA4015/SiO₂ composites have revealed the increase of porosity content and number of clusters with increased volume fraction of SiO₂ nanoparticles in AA4015 alloy matrix. The stiffness and tensile strength were not affected by the addition of SiO₂ particles to AA4015 alloy matrix.

Keywords: AA4015 alloy, silicon oxide, unit cell, finite element analysis, clustering, porosity.

1. INTRODUCTION

Particulate metal matrix composites have been shown to offer improvements in strength, wear resistance, structural efficiency, reliability and control of physical properties such as density and coefficient of thermal expansion, thereby providing improved engineering performance in comparison to the un-reinforced matrix [1]. In recent years, nano-sized materials have also drawn much interest as reinforcements in metal matrix composites because of their superior properties compared with those of micro-sized particles. One of the major challenges when processing metal matrix composites is clustering of reinforcement particles in the matrix and porosity as they have a strong impact on the properties and the quality of the material. Possible reasons resulting in particle clustering are chemical binding, surface energy reduction or particle segregation [2-5]. Another important issue is that the final stages of solidification of the composite may involve microporosity formation in the hot spots of the composite. Porosity is a major defect found in these fabricated composites, which adversely affects their fatigue properties [6-30].

The aim of this study was on porosity and cluster formation phenomena observed in the metal matrix composites having near-equal stiffness and density properties. In this study, two different models were analyzed with and without porosity and clustering of porosity formation using two-dimensional finite element analysis.

2. MATERIALS METHODS

The matrix material was AA4015 alloy. The reinforcement material was silicon oxide (SiO₂) nanoparticles of average size 100nm. AA4015/SiO₂ metal matrix composites were fabricated by the stir casting process and high pressure die casting technique with pressure at 25 MPa. The test samples were machined to get flat-rectangular specimens for the tensile tests. The tensile specimens were placed in the grips of a Universal Test Machine (UTM) at a specified grip separation and pulled until failure. The test speed was 2 mm/min. A strain gauge was used to determine elongation. In the present work, a unit cell comprising of nine particles was implemented to analyze the micromechanical behavior AA4015/SiO₂ metal matrix composites at three (10%, 20% and 30%) volume fractions of SiO₂ with and without clustering and porosity. The large strain PLANE183 element was used in the matrix in all the models. In order to model the adhesion between the matrix and the particle, a CONTACT 172 element was used. The shape of SiO₂ nanoparticle considered in this work is spherical. The periodic particle distribution was a square array. The tensile stress, elastic modulus and shear modulus are, respectively, normalized with tensile strength, elastic modulus and shear modulus of the matrix alloy.

Considering adhesion, formation of precipitates, particle size, agglomeration, voids/porosity, obstacles to the dislocation, and the interfacial reaction of the particle/matrix, the formula for the strength of composite is stated below:

$$\sigma_c = \left[\sigma_m \left\{ \frac{1 - (v_p + v_v)^{2/3}}{1 - 1.5(v_p + v_v)} \right\} \right] e^{m_p(v_p + v_v)} + k d_p^{-1/2} \quad (1)$$

$$k = E_m m_m / E_p m_p$$

where, v_v and v_p are the volume fractions of voids/porosity and nanoparticles in the composite respectively, m_p and m_m are the mass ratios of the nanoparticles and matrix respectively, d_p is the mean nanoparticle size (diameter) and E_m and E_p is elastic moduli of the matrix and the particle respectively. Elastic modulus (Young's modulus) is a measure of the stiffness of a material and is a quantity used to characterize materials. Elastic modulus is the same in all orientations for isotropic materials. Anisotropy can be seen in many composites.

The upper-bound equation is given by

$$\frac{E_c}{E_m} = \left(\frac{1-v_v^{2/3}}{1-v_v^{2/3}+v_v} \right) + \frac{1+(\delta-1)v_p^{2/3}}{1+(\delta-1)(v_p^{2/3}-v_p)} \quad (2)$$

The lower-bound equation is given by

$$\frac{E_c}{E_m} = 1 + \frac{v_p - v_p}{\delta / (\delta - 1) - (v_p + v_v)^{1/3}} \quad (3)$$

where, $\delta = E_p / E_m$.

3. RESULTS AND DISCUSSION

The density of AA4015/SiO₂ metal matrix composites decreased as shown in figure 1a with increase of volume fraction of SiO₂ nanoparticles. This is due to fact that the density (2.20g/cc) of SiO₂ is higher than that (2.71 g/cc) of AA4015 alloy.

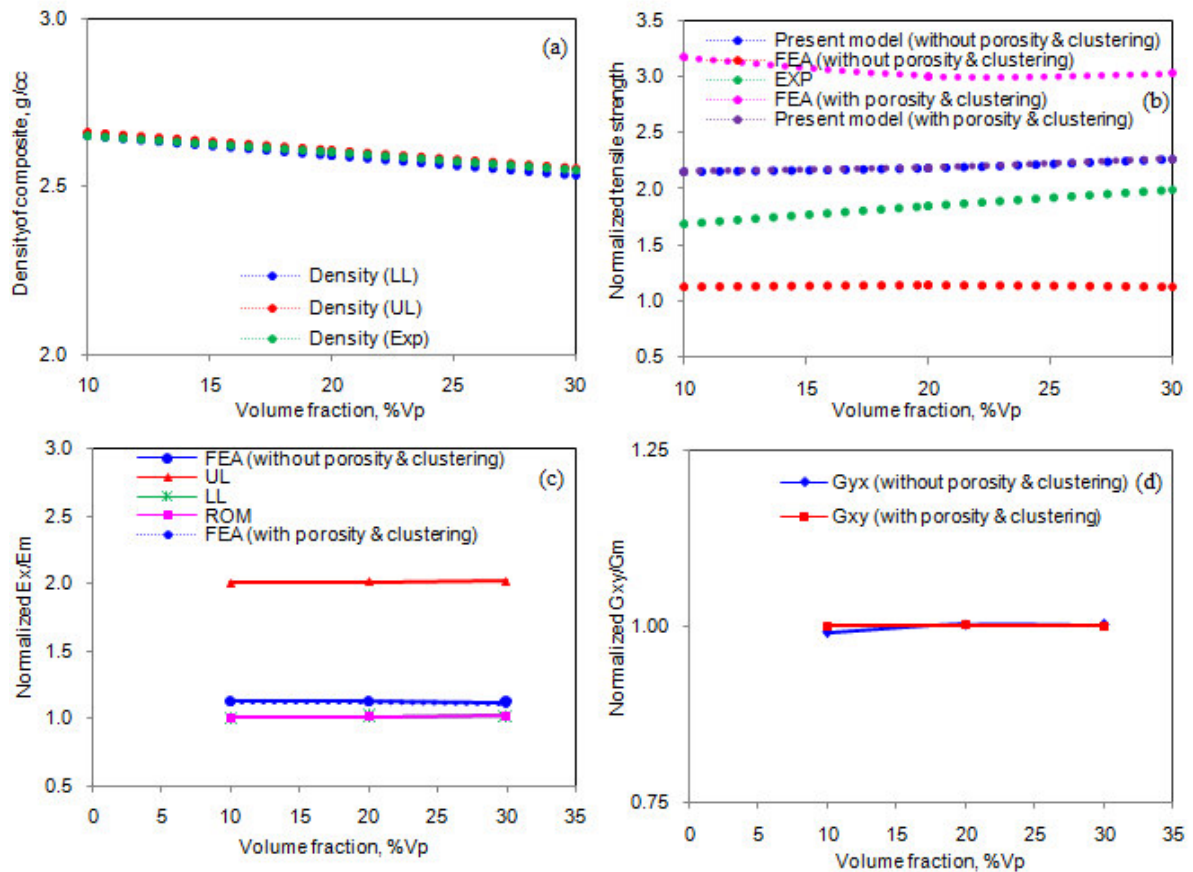


Figure 1: Effect of volume fraction on (a) density (b) normalized tensile stress, (c) normalized tensile elastic modulus and (d) normalized shear modulus of AA4015/SiO₂ composites.

Addition of SiO₂ nanoparticles to AA4015 alloy matrix did not make any improvement in the tensile strength (figure 1b), stiffness (figure 1c) and shear modulus (figure 1d) without porosity and clustering. The volume fraction of clusters and porosity voids increase with increase in volume fraction SiO₂ nanoparticles in AA4015 alloy matrix as shown in figure 2. The tensile strength decreased owing to porosity and clustering in AA4015/SiO₂ metal matrix composites. As a result of stress

concentrations at voids and clustered regions, the tensile stresses obtained from the finite element analysis (FEA) were higher than those obtained from the mathematical expression mentioned in Eq.(1) and the experimental procedure.

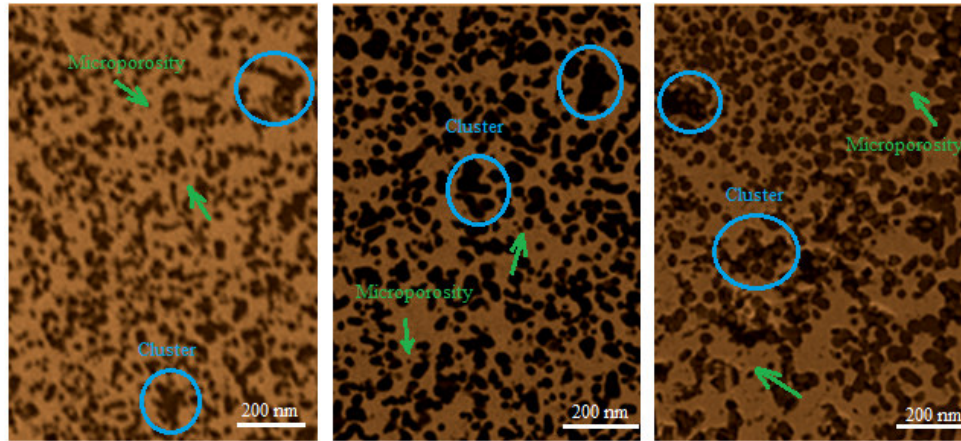


Figure 2: Porosity and clustering in AA4015/SiO₂ metal matrix composites cast by high pressure die casting technique.

Without porosity and clustering in the composites, the stress intensity remains constant with increase in the volume fraction of ZrO₂ in AA4015 alloy matrix (figure 3a). With porosity and clustering in the composites, the stress intensities were high in the composites. But, for vol.20% of SiO₂, the stress intensity is lower than that of other two volume fractions (figure 2b).

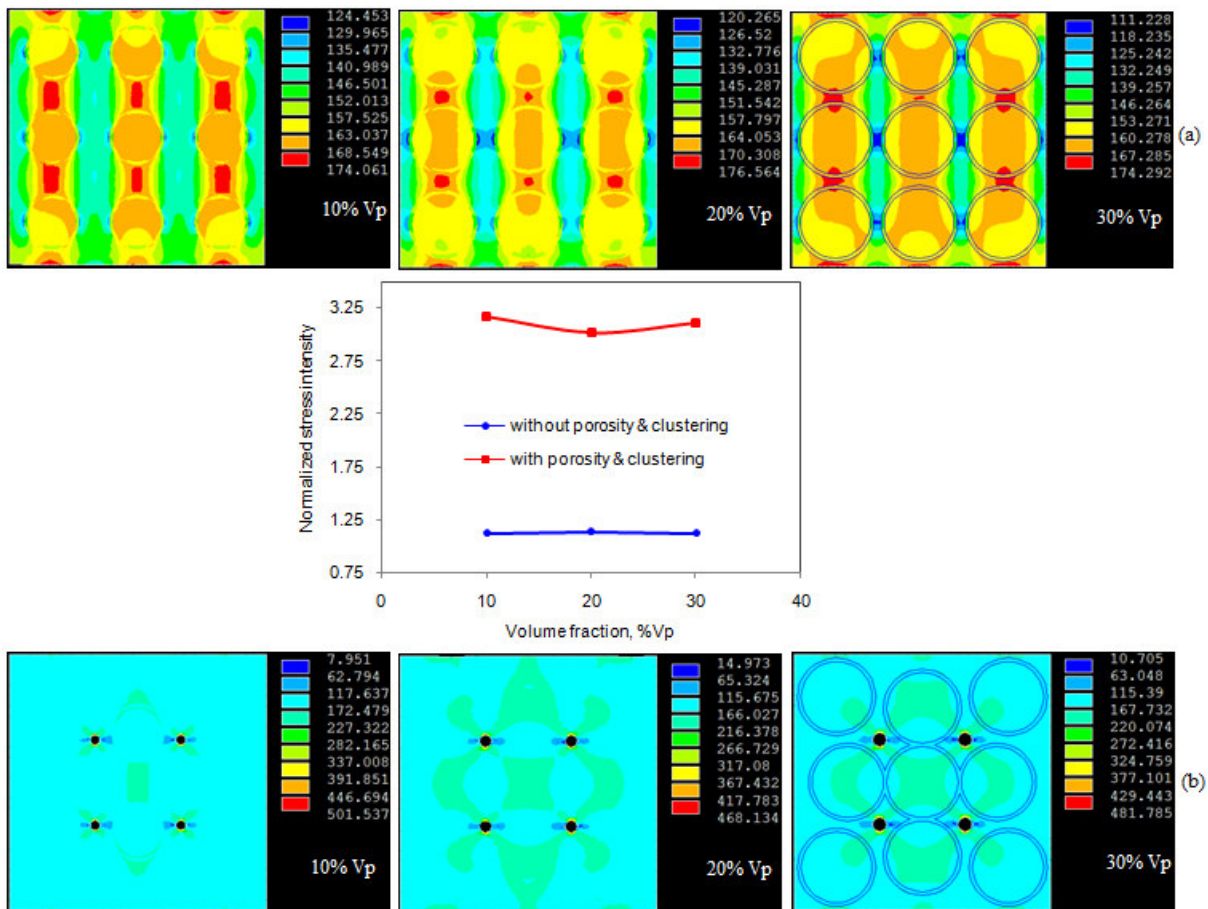


Figure 3: Images of stress intensities obtained from FEA: (a) without clustering and porosity and (b) with clustering and porosity.

4. CONCLUSION

In AA4015/SiO₂ metal matrix composites, the increase in volume fraction of SiO₂ nanoparticles did not make any appreciable enhancement of stiffness and tensile strength. The clustering and porosity decreased with the increase of volume fraction of SiO₂ in the AA4015 alloy matrix.

REFERENCES

1. P. Rohatgi, Cast metal matrix composites: past, present and future, AFS Transactions, 2001, pp. 1–133.
2. S. Naher, D. Brabazon, L. Looney, Development and assessment of a new quick quench stir caster design for the production of metal matrix composites, Journal of Materials Processing and Technology, 166, 2005, pp. 430–439.
3. Y. M. Youssef, R. J. Dashwood, P. D. Lee, Effect of clustering on particle pushing and solidification behavior in TiB₂ reinforced aluminium PMMCs, Composites Part A, 36, 2005, pp. 747–63.
4. A. Chennakesava Reddy, Investigation of the Clustering Behavior of Titanium Diboride Particles in TiB₂/AA2024 Alloy Metal Matrix Composites, 4th International Conference on Composite Materials and Characterization, Hyderabad, India, 7-8 March 2003, pp.216-220.
5. A. Chennakesava Reddy, Finite Element Analysis Study of Micromechanical Clustering Characteristics of Graphite/AA7020 Alloy Particle Reinforced Composites, 4th International Conference on Composite Materials and Characterization, Hyderabad, India, 7-8 March 2003, pp. 206-210
6. Patel, N. and L.J. Lee, Effects of fiber mat architecture on void formation and removal in liquid composite molding. Polymer Composites, 1995. 16(5): p. 386-399.
7. M. Chamundeswari and A. C. Reddy, Evaluation of strength improvement in tempered AA5050/SiC metal matrix composites using finite element analysis: experimental validation, National Conference on Advances in Design Approaches and Production Technologies (ADAPT-2005), Hyderabad, 22-23rd August 2005, pp. 338-340.
8. S. Sujatha and A. C. Reddy, Assessment of strength improvement in heat treated AA2024/SiC metal matrix composites using finite element analysis: experimental validation, National Conference on Advances in Design Approaches and Production Technologies (ADAPT-2005), Hyderabad, 22-23rd August 2005, pp. 341-343.
9. B. Ramana, A. C. Reddy, and S. Somi Reddy, Fracture analysis of mg-alloy metal matrix composites, National Conference on Computer Applications in mechanical Engineering, Anantapur, 21st December 2005, pp.57-61.
10. A. Chennakesava Reddy and B. Kotiveerachari, Effect of Matrix Microstructure and Reinforcement Fracture on the Properties of Tempered SiC/Al-Alloy Composites, National conference on advances in materials and their processing, Bagalkot, 28-29th November, 2003, pp.78-81.
11. A. Chennakesava Reddy, Analysis of the Relationship Between the Interface Structure and the Strength of Carbon-Aluminum Composites, NATCON-ME, Bangalore, 13-14th March2004, pp.61-62.
12. A. Chennakesava Reddy, Studies on fracture behavior of brittle matrix and alumina trihydrate particulate composites, Indian Journal of Engineering & Materials Sciences, 9, 2003, pp.365-368.
13. A. Chennakesava Reddy, Experimental Evaluation of Elastic Lattice Strains in the Discontinuously SiC Reinforced Al-alloy Composites, National Conference on Emerging Trends in Mechanical Engineering, Nagapur, 05-06th February, 2004, pp.81, Paper No. e-TIME/110/E-07.
14. V. K. Prasad and A. C. Reddy, Tensile behavior of tempered AA5050/Al₂O₃ metal matrix composites using RVE models: experimental validation, National Conference on Advances in Design Approaches and Production Technologies (ADAPT-2005), Hyderabad, 22-23rd August 2005, pp. 335-337.
15. K. Swapna Sudha and A. C. Reddy, Tensile performance of heat treated AA2024/Al₂O₃ metal matrix composites using RVE models: experimental validation, National Conference on Advances in Design Approaches and Production Technologies (ADAPT-2005), Hyderabad, 22-23rd August 2005, pp. 332-334.
16. A. Chennakesava Reddy, Micromechanical and fracture behaviors of Ellipsoidal Graphite Reinforced AA2024 Alloy Matrix Composites, 2nd National Conference on Materials and Manufacturing Processes, Hyderabad, India, 10-11 March 2000, pp. 96-103.
17. A. Chennakesava Reddy, Constitutive Behavior of AA5050/MgO Metal Matrix Composites with Interface Debonding: the Finite Element Method for Uniaxial Tension, 2nd National Conference on Materials and Manufacturing Processes, Hyderabad, India, 10-11 March 2000, pp. 121-127.
18. A. Chennakesava Reddy, Effect of CTE and Stiffness Mismatches on Interphase and Particle Fractures of Zirconium Carbide /AA5050 Alloy Particle-Reinforced Composites, 3rd International Conference on Composite Materials and Characterization, Chennai, India, 11-12 May 2001, pp. 257-262.
19. S. Ray, Casting of composite components, Proceeding of the 1995 Conference on Inorganic Matrix Composites, 1996, pp.69-89.
20. A. Chennakesava Reddy, Behavioral Characteristics of Graphite /AA6061 Alloy Particle-Reinforced Metal Matrix Composites, 3rd International Conference on Composite Materials and Characterization, Chennai, India, 11-12 May 2001, pp. 263-269.

21. A. Chennakesava Reddy, Simulation of MgO/AA6061 Particulate-Reinforced Composites Taking Account of CTE Mismatch Effects and Interphase Separation, 3rd National Conference on Materials and Manufacturing Processes, Hyderabad, India, 22-25 February 2002, pp. 184-187.
22. A. Chennakesava Reddy, Two dimensional (2D) RVE-Based Modeling of Interphase Separation and Particle Fracture in Graphite/5050 Particle Reinforced Composites, 3rd National Conference on Materials and Manufacturing Processes, Hyderabad, India, 22-25 February 2002, pp. 179-183.
23. S. Madhav Reddy, A. Chennakesava Reddy, Effects of Porosity on Mechanical Properties of Zirconium Oxide/AA1100 Alloy Metal Matrix Composites, 5th National Conference on Materials and Manufacturing Processes, Hyderabad, 9-10 June 2006, pp. 124-128.
24. Essa Zitoun, A. Chennakesava Reddy, High Pressure Die Casting Process on Micromechanical Properties of AA2024/Boron Carbide Metal Matrix Composites, 5th National Conference on Materials and Manufacturing Processes, Hyderabad, 9-10 June 2006, pp.129-133.
25. Essa Zitoun, A. Chennakesava Reddy, Micromechanical and Porosity Studies of Cast AA3003/ Boron Nitride Metal Matrix Composites, 5th National Conference on Materials and Manufacturing Processes, Hyderabad, 9-10 June 2006, pp. 134-138.
26. A. Chennakesava Reddy, Effect of Porosity Formation during Synthesis of Cast AA4015/Titanium Nitride Particle-Metal Matrix Composites, 5th National Conference on Materials and Manufacturing Processes, Hyderabad, 9-10 June 2006, pp. 139-143.
27. A. Chennakesava Reddy, Stir Casting Process on Porosity Development and Micromechanical Properties of AA5050/Titanium Oxide Metal Matrix Composites, 5th National Conference on Materials and Manufacturing Processes, Hyderabad, 9-10 June 2006, pp. 144-148.
28. A. C. S. Kumar, A. Chennakesava Reddy, Effect of Cold Rolling on Porosity and Micromechanical Properties of AA6061/Zirconium Carbide Metal Matrix Composites, 5th National Conference on Materials and Manufacturing Processes, Hyderabad, 9-10 June 2006, pp. 149-153.
29. S. Madhav Reddy, A. Chennakesava Reddy, Effect of Reinforcement Loading on Porosity and Micromechanical Properties of AA7020/Graphite Metal Matrix Composites, 5th National Conference on Materials and Manufacturing Processes, Hyderabad, 9-10 June 2006, pp. 154-158.
30. A. C. S. Kumar, A. Chennakesava Reddy, Microstructure and Properties of Liquid Metal Processed MgO Reinforced AA8090 Metal Matrix Composites, 5th National Conference on Materials and Manufacturing Processes, Hyderabad, 9-10 June 2006, pp. 159-163.